



FLOOR OUTLET BOX

(Two or Three Compartments)

Structure

Side blanks can be adapted to take metal ducts, UPVC duct or conduits and are manufactured from Pre-Galvanised sheet steel. Brass terminals are provided for earth connection on the base plate.

The frame, trap and ratchet are manufactured from UL94V-0 flame retardant ABS material which provides the box with strength and durability. The die cast pillars and polyamide carpet trims are the load bearing components of the box. The trap frame is secured to the basic box using a ratchet arrangement, hence making installation and removal easier.

The reversible frame incorporates a unique ratchet system and is designed to self-adjust to any normal floor finish thickness. Ratchet bars provide efficient installation and removal without the need for tools, secure the frame.

A steel reinforcing plate is placed in the snap-in lid or trap, which is reversible, and readily detaches from the frame when accidentally kicked or knocked. The trap has a 7mm recess to accommodate carpet or similar floor finishes.


A retractable handle provides access to the interior of the floor box. The trap and frame of the floor box have an easy-to-clean texture as well.

Detachable cable retainers guide wires to nylon cable grommets attached to the lid. The grommets lock in position when cables are present, thus preventing snapping of cables.

A wide range of inter-changeable accessory plates that can accommodate power, data and telephone outlets are available.

A void depth of 60 to 90mm is recommended. The minimum depth of polyamide box is 50mm, Series boxes can be adapted to take ducts from 25 to 38mm. They can be manufactured to accommodate void up to 50mm height on request. The boxes are available in one, two or three compartments.

The polyamide service boxes are available only in 270 x 270mm in two or three compartments only.

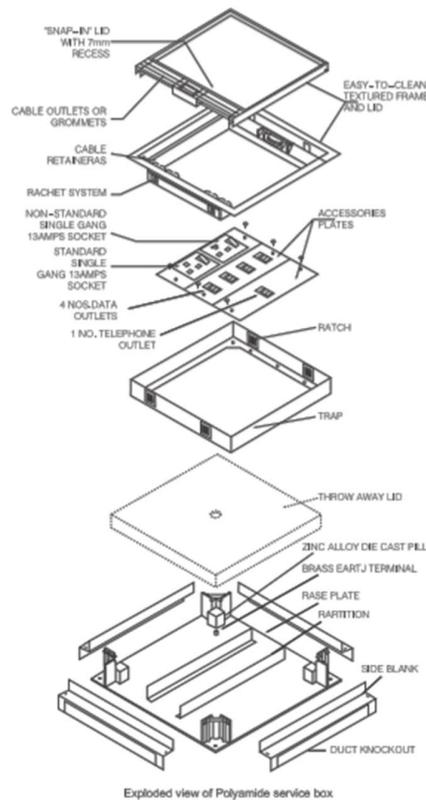

PRODUCT DATASHEET

FLOOR OUTLET BOX



SIZE : 270 X 270 MM
DEPTH : 60 TO 90MM

DEVAR HOLDINGS LIMITED

Tel: (852) 3108 2108
Fax: (852) 3108 2100

www.devargroup.com.hk
enquiries@devargroup.com.hk